FIG. 1A

F I G. 1B

```
              ┌──────────┐
              │  DEVICE  │
              │    A     │
              └──────────┘
               ╱        ╲
        ┌──────────┐  ┌──────────┐
        │  DEVICE  │  │  DEVICE  │
        │    B     │  │    C     │
        └──────────┘  └──────────┘
            ╲          ╱  │  ╲      1394 SERIAL BUS
       ┌──────────┐
       │  DEVICE  │  ┌──────────┐┌──────────┐┌──────────┐
       │    D     │  │  DEVICE  ││  DEVICE  ││  DEVICE  │
       └──────────┘  │    F     ││    G     ││    H     │
          ╲          └──────────┘└──────────┘└──────────┘
    ┌──────────┐
    │  DEVICE  │
    │    E     │
    └──────────┘
```

F I G. 2

FIG. 3

BUS #0	
BUS #1	
.	
.	
.	
BUS #1022	
BUS #1023	

LOCAL BUS

NODE #0
NODE #1
.
.
.
NODE #62
NODE #63

BROADCAST

INITIAL MEMORY SPACE
PRIVATE SPACE
REGISTER SPACE

CSR ARCHITECTURE
SERIAL BUS
ROM
INITIAL UNITS SPACE

BUS NO. 10 BITS	NODE NO. 6 BITS		UNIQUE DATA AREA 28BITS

48BITS

64BITS

FIG. 4

POWER-SOURCE LINE
8-40V DC, MAXIMUM CURRENT 1.5A

TWISTED PAIR SIGNAL LINES

CROSS-SECTION OF CABLE

SIGNAL-LINE SHIELD

FIG. 5

CLOCK : EXCLUSIVE-OR SIGNAL BETWEEN DATA AND STROBE

F I G. 6

START
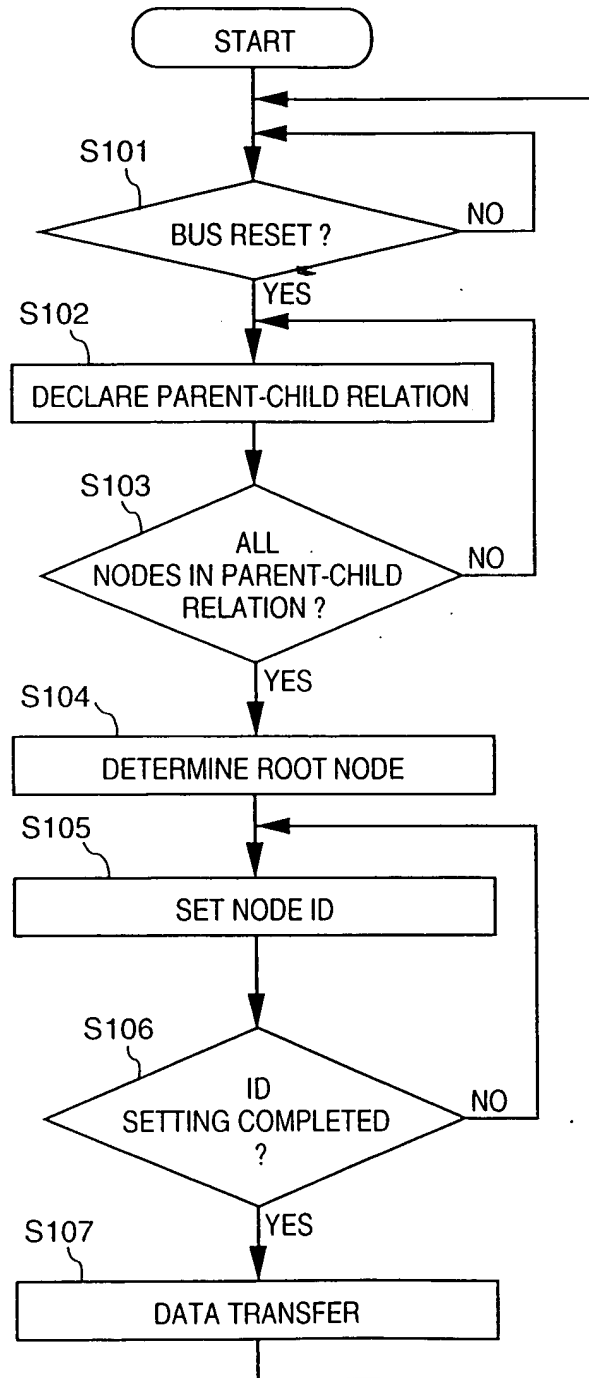
S101
BUS RESET ?　　NO

↓YES

S102
DECLARE PARENT-CHILD RELATION

S103
ALL
NODES IN PARENT-CHILD
RELATION ?　　NO

↓YES

S104
DETERMINE ROOT NODE

S105
SET NODE ID

S106
ID
SETTING COMPLETED
?　　NO

↓YES

S107
DATA TRANSFER

F I G. 7

```
                    ┌─────────────┐
                    │   START     │
                    └─────────────┘
                           │
                           │        ◄─────────────┐
S201                       ▼                      │
              ◇───────────────────────◇  NO       │
              ◇      BUS RESET ?       ◇──────────┘
              ◇───────────────────────◇
                           │ YES
S202                       ▼
              ┌─────────────────────────┐
              │      FL ← LEAF          │
              └─────────────────────────┘
                           │
S203                       ▼
              ┌─────────────────────────┐
              │     CONFIRM PORT        │
              └─────────────────────────┘
                           │              ◄───────────────────┐
S204                       ▼                                  │
        = 0   ◇───────────────────────◇   > 1                 │
    ┌─────────◇      NUMBER            ◇──────────┐            │
    │         ◇  OF UNDEFINED PORTS    ◇          │            │
    │         ◇         ?              ◇          │            │
    │         ◇───────────────────────◇          │            │
    │                    │ = 1                    │            │
S208│                    ▼            S206         ▼            │
┌───────────┐  ┌──────────────────┐  ┌──────────────────┐     │
│ FL ← ROOT │  │ DECLARE AS CHILD │  │  FL ← BRANCH     │     │
└───────────┘  └──────────────────┘  └──────────────────┘     │
    │               │  S205                  │                 │
    ▼               │               S207     ▼                 │
┌───────────┐       │            ┌──────────────────┐          │
│CONFIRM ROOT│      │            │ RECEIVE AS PARENT │─────────┘
└───────────┘       │            └──────────────────┘
    │               │                 
S209│               │                 
    └───────────────┤
                    ▼
              ┌─────────────┐
              │    END      │
              └─────────────┘
```

FIG. 8

START

S301 FL ?
ROOT — BRANCH
LEAF

S302 — SET NUMBER OF LEAVES TO N

S303 — REQUEST NODE NUMBER

S304 — ARBITRATION

S305 — NOTIFY RESULT

S306 — NODE NUMBER OBTAINED ? — NO

YES

S307 — BROADCAST ID INFORMATION

S308 — N = N − 1

S309 — N ? — > 1

= 0

S310 — SET NUMBER OF BRANCHES TO M

S311 — REQUEST NODE NUMBER

S312 — ARBITRATION

S313 — NOTIFY RESULT

S314 — NODE NUMBER OBTAINED ? — NO

YES

S315 — BROADCAST ID INFORMATION

S316 — M = M − 1

S317 — M ? — > 1

= 0

S318 — OBTAIN ROOT NODE NUMBER

S319 — BROADCAST ID INFORMATION

END

F I G. 9

ROOT

NO.5 NO.3

NODE B BRANCH BRANCH NODE D
p p c p p

NODE NO.0   NO.2

NODE A LEAF c   c LEAF NODE F

NODE C c p   c
BRANCH   LEAF NODE E

NO.4   NO.1

BRANCH : NODE WITH TWO OR MORE NODE CONNECTIONS

LEAF : NODE WITH SINGLE PORT CONNECTION

□ : PORT
c : PORT CORRESPONDING TO CHILD NODE
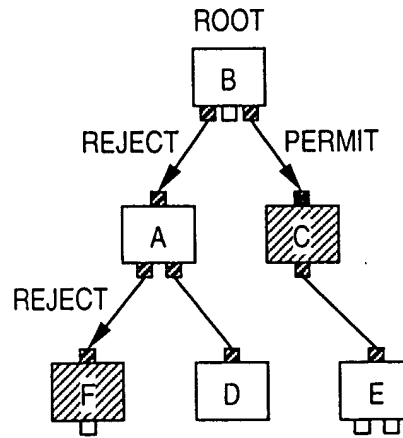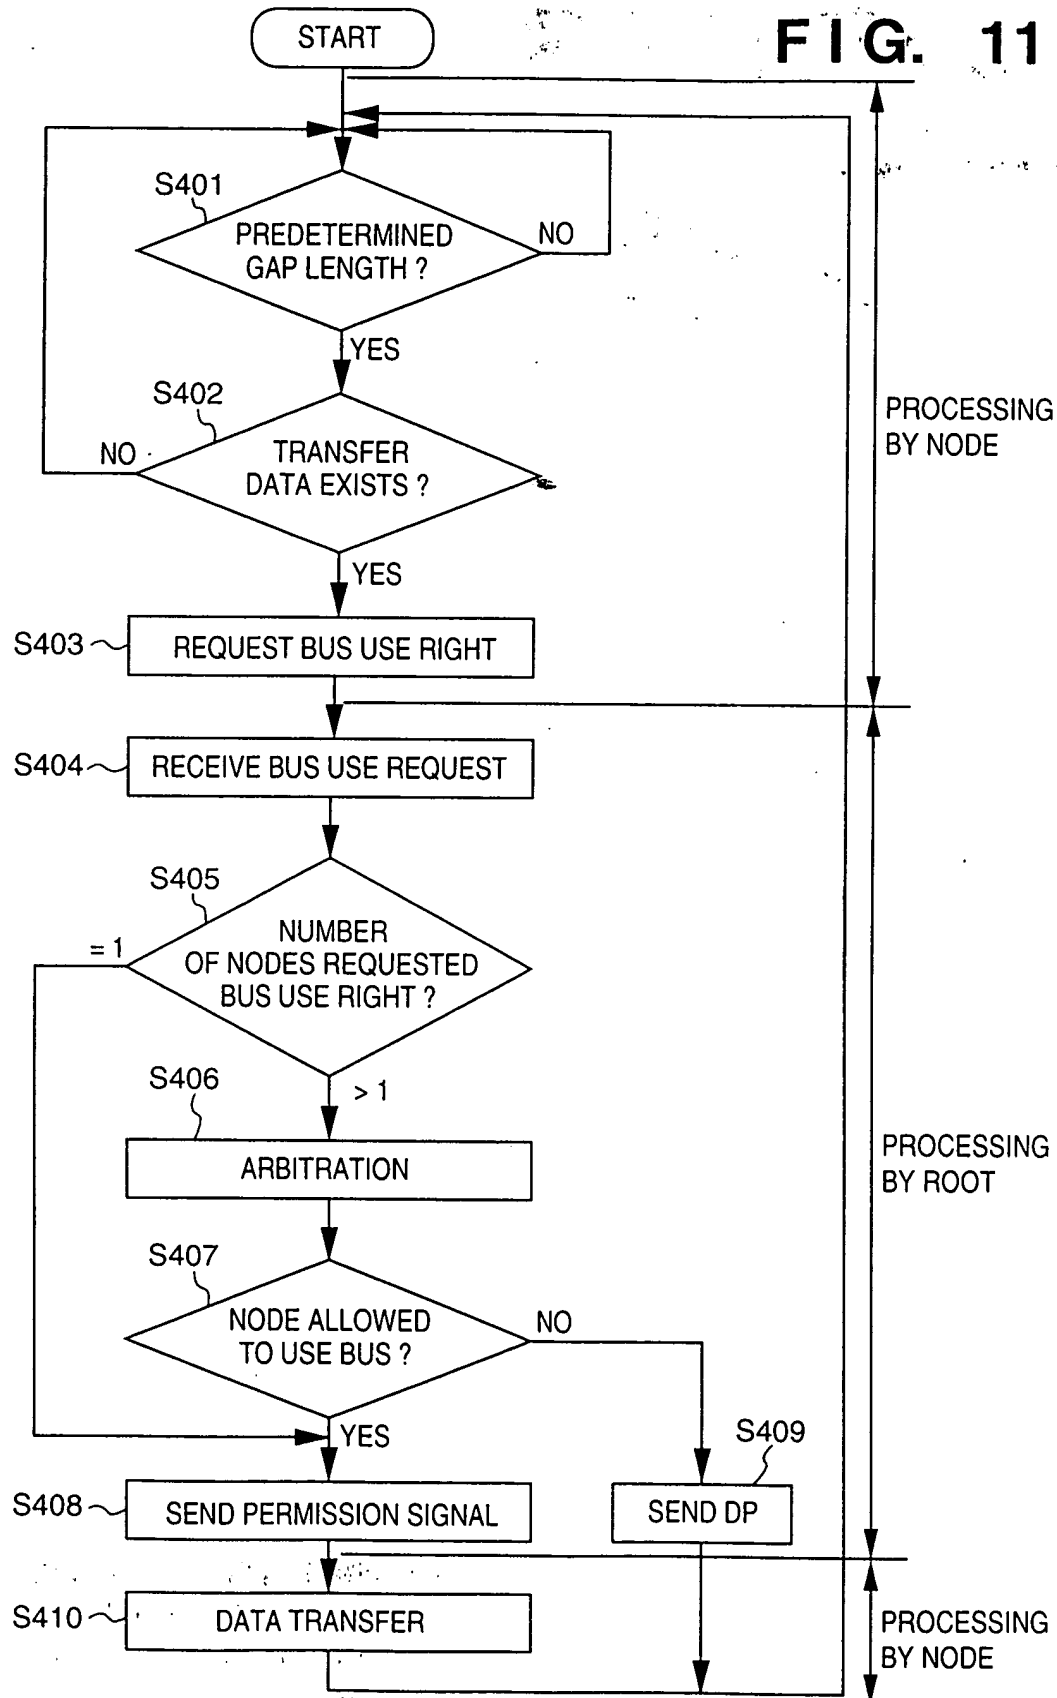p : PORT CORRESPONDING TO PARENT NODE

F I G. 10A   F I G. 10B

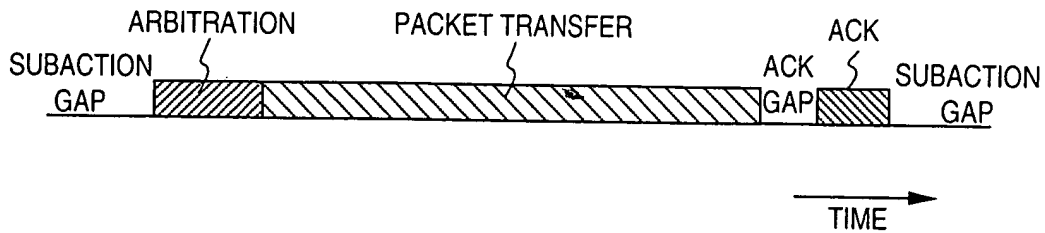ROOT   ROOT

B   B

REQUEST REQUEST REJECT PERMIT

A C   A C

REQUEST   REJECT

F D E   F D E

FIG. 11

```
                    ( START )

        S401
              PREDETERMINED        NO
              GAP LENGTH ?

                   │ YES

        S402
              TRANSFER
        NO    DATA EXISTS ?

                   │ YES

   S403    REQUEST BUS USE RIGHT

   S404    RECEIVE BUS USE REQUEST

        S405
              NUMBER
   = 1      OF NODES REQUESTED
            BUS USE RIGHT ?

                   │ > 1

   S406       ARBITRATION

        S407
              NODE ALLOWED         NO
              TO USE BUS ?

                   │ YES                    S409

   S408    SEND PERMISSION SIGNAL        SEND DP

   S410         DATA TRANSFER
```

PROCESSING
BY NODE

PROCESSING
BY ROOT

PROCESSING
BY NODE

FIG. 12

SUBACTION GAP — ARBITRATION — PACKET TRANSFER — ACK GAP — ACK — SUBACTION GAP

TIME →

FIG. 13

	32bits				
	16bits	6bits	2bits	4bits	4bits
TOTAL : 24 + 4 × N BYTES	DESTINATION NODE ID	tl	rt	tcode	PRIORITY
	SOURCE NODE ID				
	PACKET TYPE SPECIFIC INFORMATION				
	DATA LENGTH		EXTENDED tcode		
	HEADER CRC				
	DATA FIELD 4 × N BYTES				
	DATA CRC				

F I G.　14

CSP

CHANNEL A　　CHANNEL B　　CHANNEL C

CSP

SUBACTION
GAP
ISO
GAP
ISO
GAP
ISO
GAP
SUBACTION
GAP
ISO
GAP

1 CYCLE : 125μS

TIME

CSP : CYCLE START PACKET　　ARBITRATION　　PACKET TRANSFER

ISO GAP : ISOCHRONOUS GAP

F I G.　15A

32bits

16bits　　2bits　6bits　　4bits　4bits

DATA LENGTH	TAG	CHANNEL NO.	tcode	sy

TOTAL :
24 + 4 × N
BYTES

HEADER CRC

DATA FIELD
4 × N BYTES

DATA CRC

FIG. 15B

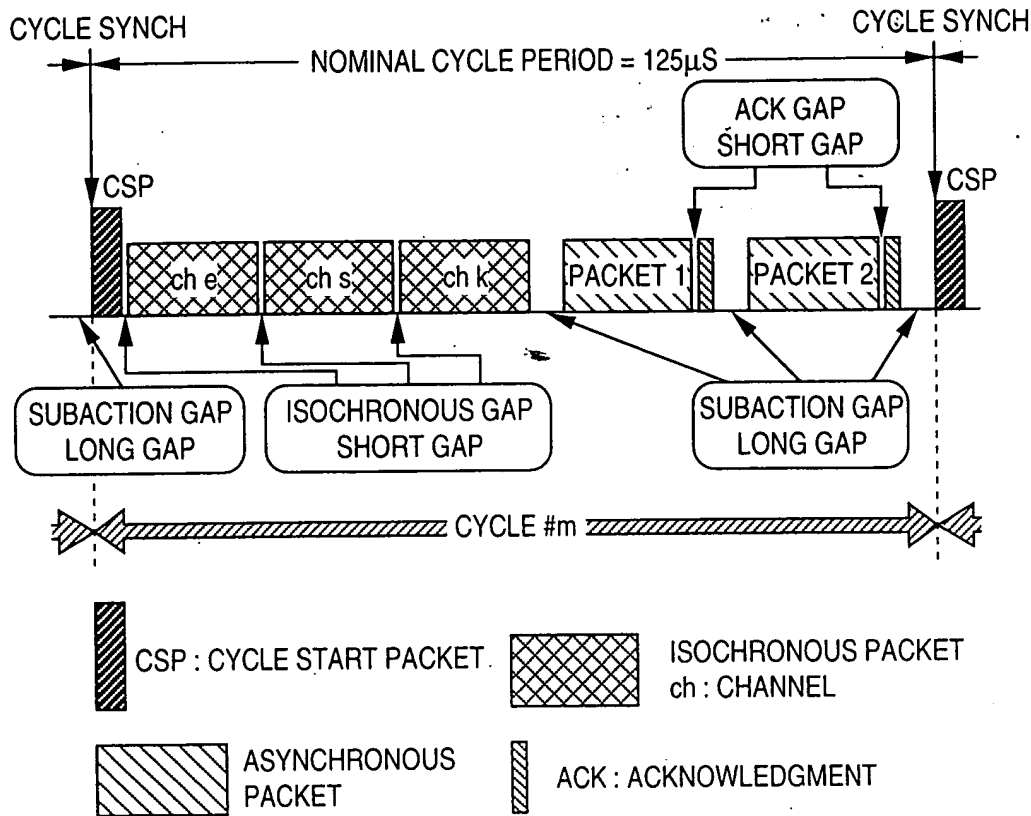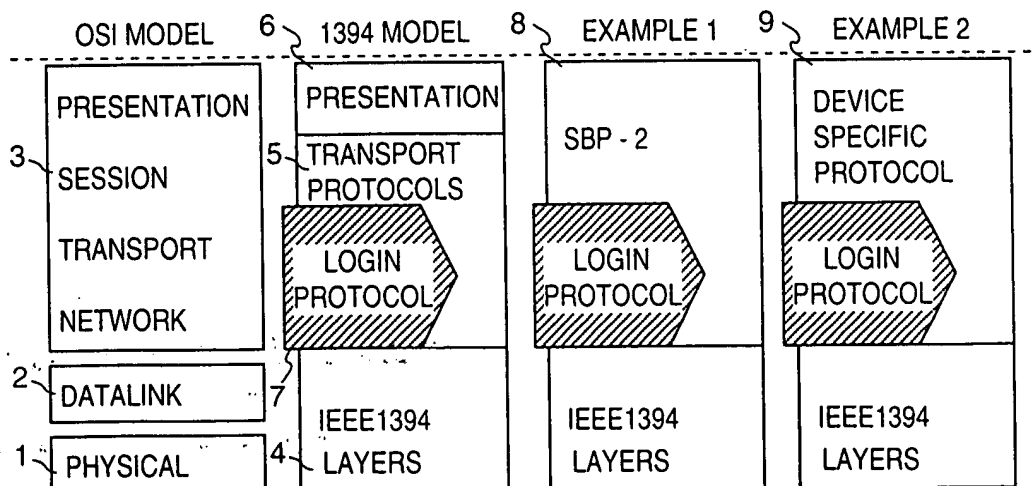| ABBREVIATION	NAME	CONTENT
destination_ID	destination identifier	ID OF DESTINATION NODE (ASYNCHRONOUS ONLY)
t1	transaction label	LABEL INDICATING A SERIES OF TRANSACTIONS (ASYNCHRONOUS ONLY)
rt	retry code	CODE INDICATING RETRANSMISSION STATUS (ASYNCHRONOUS ONLY)
tcode	transaction code	CODE INDICATING PACKET TYPE (ASYNCHRONOUS ONLY)
pri	priority	PRIORITY ORDER (ASYNCHRONOUS ONLY)
source_ID	source identifier	SOURCE NODE (ASYNCHRONOUS ONLY)
destination_offset	destination memory address	MEMORY ADDRESS OF DESTINATION NODE (ASYNCHRONOUS ONLY)
rcode	response code	RESPONSE STATUS (ASYNCHRONOUS ONLY)
quadiet_data	quadiet(4bytes) data	4-BYTE LENGTH DATA (ASYNCHRONOUS ONLY)
data_length	length of data	LENGTH OF data_field (EXCEPT pad bytes)
extended_tcode	extended transaction code	EXTENDED TRANSACTION CODE (ASYNCHRONOUS ONLY)
chanel	isochronous identifier	IDENTIFICATION OF ISOCHRONOUS PACKET
sy	synchronization code	SYNCHRONIZATION OF VIDEO IMAGE AND AUDIO INFORMATION
cycle_time_data	contents of the CYCLE_TIME register	CYCLE TIMER REGISTER VALUE OF CYCLE MASTER NODE (CYCLE PACKET ONLY)
data_field	data + pad bytes	DATA STORAGE (ISOCHRONOUS AND ASYNCHRONOUS)
header_CRC	CRC for header field	CRC FOR HEADER
data_CRC	CRC for data field	CRC FOR DATA
tag	tag label	ISOCHRONOUS PACKET FORMAT

F I G. 16

CYCLE SYNCH

CYCLE SYNCH

NOMINAL CYCLE PERIOD = 125μS

ACK GAP
SHORT GAP

CSP

CSP

ch e

ch s

ch k

PACKET 1

PACKET 2

SUBACTION GAP
LONG GAP

ISOCHRONOUS GAP
SHORT GAP

SUBACTION GAP
LONG GAP

CYCLE #m

CSP : CYCLE START PACKET

ISOCHRONOUS PACKET
ch : CHANNEL

ASYNCHRONOUS
PACKET

ACK : ACKNOWLEDGMENT

F I G. 17

OSI MODEL	6 1394 MODEL	8 EXAMPLE 1	9 EXAMPLE 2
PRESENTATION	PRESENTATION	SBP - 2	DEVICE SPECIFIC PROTOCOL
3 SESSION	5 TRANSPORT PROTOCOLS		
TRANSPORT	LOGIN PROTOCOL	LOGIN PROTOCOL	LOGIN PROTOCOL
NETWORK			
2 DATALINK	7 IEEE1394 LAYERS	IEEE1394 LAYERS	IEEE1394 LAYERS
1 PHYSICAL	4		

F I G. 18

FIG. 19

LOGIN
PROTOCOL

MULTI-PROTOCOL SUPPORT

LOGIN
PROTOCOL

LOGIN
PROTOCOL

FIG. 20

HOST		DEVICE

CONNECT

STEP 1 :
• CONNECTING AND LOCKING
  A DEVICE
• INQUIRING CAPABILITIES WHICH
  INCLUDE TRANSPORT PROTOCOL
• SETTING CAPABILITIES WHICH
  INCLUDE TRANSPORT PROTOCOL

PRINT DATA

REVERSE DATA

TRANSPORT PROTOCOL

CONNECTION
ESTABLISHED

STEP 2 :
• PERFORMING PRINT FUNCTION
  USING SET TRANSPORT
  PROTOCOL

DISCONNECT

STEP 3 :
• DISCONNECTING THE DEVICE

FIG. 21

```
                                                    501
┌──────────────────────────────────────────────┐
│                    LOCK                        │
│ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │
└──────────────────────────────────────────────┘
```

```
                                                    502
┌──────────────────────────────────────────────┐
│                  PROTOCOL                      │
│h│t│p│m│ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │
└──────────────────────────────────────────────┘
```

```
                                                    503
┌──────────────────────────────────────────────┐
│                 CAPABILITY                     │
│h│t│p│-│ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │ │
└──────────────────────────────────────────────┘
```

FIG. 22

```
         ┌─────────────────────┐
         │    LOGIN START      │
         │       HOST          │
         └─────────────────────┘
                    │
                    ▼
S601 ─┐  ┌─────────────────────┐
      └──│  OBTAIN PRINTER STATUS │
         │  AND PRINTER PROTOCOL │
         └─────────────────────┘
                    │
          S602      ▼
              ◇─────────────────◇   NO
              │     LOGIN ?      │──────┐
              ◇─────────────────◇      │
                    │ YES              │
S603 ─┐  ┌─────────────────────┐      │
      └──│   LOCK RESOURCE     │      │
         └─────────────────────┘      │
                    │                 │
S604 ─┐  ┌─────────────────────┐      │
      └──│    SET PROTOCOL     │      │
         └─────────────────────┘      │
                    │                 │
S605 ─┐  ┌─────────────────────┐      │
      └──│    TRANSMIT DATA    │      │
         └─────────────────────┘      │
                    │                 │
S606 ─┐  ┌─────────────────────┐      │
      └──│      LOGOUT         │      │
         └─────────────────────┘      │
                    │                 │
                    ▼◄────────────────┘
         ┌─────────────────────┐
         │    LOGIN END        │
         │       HOST          │
         └─────────────────────┘
```

FIG. 23

```
        ┌─────────────────┐
        │   LOGIN START   │
        │     PRINTER     │
        └─────────────────┘
                 │
                 ▼
        ┌─────────────────────┐
        │ WAIT FOR LOGGED - IN │────S701
        └─────────────────────┘
                 │
                 ▼
        ┌─────────────────────┐
        │ WAIT FOR RECEPTION OF │────S702
        │   USING PROTOCOL    │
        └─────────────────────┘
                 │
                 ▼
        ┌─────────────────────┐
        │  SET USING PROTOCOL │────S703
        └─────────────────────┘
                 │
   S704          ▼
        ◇─────────────────◇      YES
        ◇   PROTOCOL A ?  ◇──────────────────►
        ◇─────────────────◇
                 │ NO                    PERFORM
   S706          ▼                    COMMUNICATION
        ◇─────────────────◇   YES    BY PROTOCOL A
        ◇   PROTOCOL B ?  ◇──────►        S705
        ◇─────────────────◇
                 │ NO              PERFORM
   S708          ▼              COMMUNICATION
        ◇─────────────────◇ YES  BY PROTOCOL B
        ◇   PROTOCOL C ?  ◇──►       S707
        ◇─────────────────◇
                 │ NO      PERFORM
                 │     S709─COMMUNICATION
                 │        BY PROTOCOL C
                 ▼
        ┌─────────────────┐
        │   LOGGED - OUT  │────S710
        └─────────────────┘
```

F I G. 24

PRINT TASK

10

7

LOGIN PROTOCOL

PROTOCOL SWITCH

PROTOCOL
D

PROTOCOL
A

PROTOCOL
B

PROTOCOL
C

F I G. 25

OSI MODEL	1394 MODEL	15 EXAMPLE 3	16 EXAMPLE 4
	6	AV DEVICE	SCANNER
PRESENTATION	PRESENTATION		
3 SESSION	5 TRANSPORT PROTOCOLS	AV/C PROTOCOL COMPLIANT	DEVICE SPECIFIC PROTOCOL
TRANSPORT	LOGIN PROTOCOL		
NETWORK	7		
2 DATALINK	IEEE1394 LAYERS	IEEE1394 LAYERS	IEEE1394 LAYERS
1 PHYSICAL	4		

F I G. 26A

CSR CORE REGISTER

OFFSET (hexadecimal)	REGISTER NAME	FUNCTION
000	STATE_CLEAR	INFORMATION ON STATUS AND CONTROL
004	STATE_SET	INFORMATION ON WRITE ENABLE/DISABLE STATUS OF STATE_CLEAR
008	NODE_IDS	BUS ID + NODE ID
00C	RESET_START	TO RESET BUS BY WRITING INTO THIS AREA
010~014	INDIRECT_ADDRESS, INDIRECT_DATA	REGISTER TO ACCESS ROM AREA GREATER THAN 1KB
018~01C	SPLIT_TIMEOUT	TIMER VALUE TO DETECT TIME-OUT OF SPLIT TRANSACTION
020~02C	ARGUMENT, TEST_START, TEST_STATUS	REGISTER FOR DIAGNOSIS
030~04C	UNITS_BASE, UNITS_BOUND, MEMORY_BASE, MEMORY_BOUND	NOT INSTALLED IN IEEE 1394
050~054	INTERRUPT_TARGET, INTERRUPT_MASK	REGISTER OF INTERRUPTION NOTIFICATION
058~07C	CLOCK_VALUE, CLOCK_TICK_PERIOD, CLOCK_STOROBE_ARRIVED, CLOCK_INFO	NOT INSTALLED IN IEEE 1394
080~0FC	MESSAGE_REQUEST, MESSAGE_RESPONSE	REGISTER FOR MESSAGE NOTIFICATION
100~17C		RESERVATION
180~1FC	ERROR_LOG_BUFFER	TO RESERVE FOR IEEE 1394

FIG. 26B

SERIAL BUS REGISTER

OFFSET (hexadecimal)	REGISTER NAME	FUNCTION
200	CYCLE_TIME	COUNTER FOR ISOCHRONOUS TRANSFER
204	BUS_TIME	REGISTER FOR TIME SYNCHRONIZATION
208	POWER_FAIL_IMMINENT	REGISTER RELATING TO POWER SUPPLY
20C	POWER_SOURCE	
210	BUSY_TIMEOUT	TO CONTROL RETRY IN TRANSACTION LAYER
214~218		RESERVATION
21C	BUS_MANAGER_ID	NODE ID OF BUS MANAGER
220	BANDWIDTH_AVAILABLE	TO MANAGE ISOCHRONOUS TRANSFER BAND
224~228	CHANNELS_AVAILABLE	TO MANAGE CHANNEL NUMBER FOR ISOCHRONOUS TRANSFER
22C	MAINT_CONTROL	REGISTER FOR DIAGNOSIS
230	MAINT_UTILITY	
234~3FC		RESERVATION

FIG. 26C

SERIAL-BUS NODE RESOURCE REGISTER

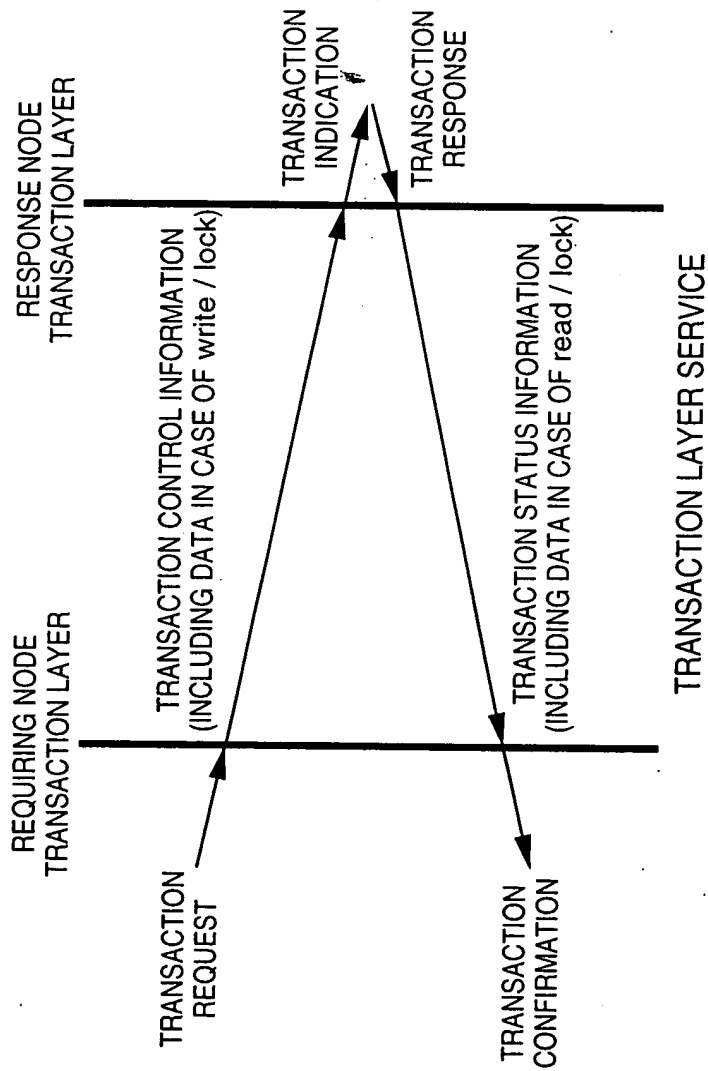| OFFSET (hexadecimal)	REGISTER NAME	FUNCTION
800~FFC		RESERVATION
1000~13FC	TOPOLOGY-MAP	INFORMATION ON SERIAL BUS STRUCTURE
1400~1FFC		RESERVATION
2000~2FFC	SPEED-MAP	INFORMATION ON TRANSFER SPEED OF SERIAL BUS
3000~FFFC		RESERVATION

FIG. 26D

MINIMUM FORMAT CONFIGURATION ROM

01	VENDOR ID

FIG. 26E

GENERAL FORMAT CONFIGURATION ROM

LENGTH OF bus_info_block	LENGTH OF ROM	CRC
bus_info_block (ASCII CODE OF 1394 BUS AND INFORMATION ON WHETHER OR NOT NODE HAS CAPABILITIES OF ISOCHRONOUS RESOURCE MANAGEMENT, CYCLE MASTER, AND BUS MANAGEMENT)		
root_directory (INDICATE VENDOR ID AND NODE FUNCTION)		
unit_directories (INDICATE UNIT TYPE AND DRIVER SOFT VERSION)		
root & unit_leaves		
vendor_dependent_information		

FIG. 27A

RESPONSE NODE
TRANSACTION LAYER

REQUIRING NODE
TRANSACTION LAYER

TRANSACTION CONTROL INFORMATION
(INCLUDING DATA IN CASE OF write / lock)

TRANSACTION STATUS INFORMATION
(INCLUDING DATA IN CASE OF read / lock)

TRANSACTION
INDICATION

TRANSACTION
RESPONSE

TRANSACTION
REQUEST

TRANSACTION
CONFIRMATION

TRANSACTION LAYER SERVICE

FIG. 27B

RESPONSE NODE
LINK LAYER

REQUIRING NODE
LINK LAYER

LINK
REQUEST

LINK
INDICATION

LINK
RESPONSE

LINK
CONFIRMATION

ARBITRATION, DATA PACKET

ACKNOWLEDGMENT

ABSENT IN CASE OF BROADCASING
OR ISOCHRONOUS PACKET

LINK LAYER SERVICE

F I G. 28A

REQUIRING NODE TRANSACTION LAYER REQUIRING NODE LINK LAYER RESPONSE NODE LINK LAYER RESPONSE NODE TRANSACTION LAYER

WRITE REQUEST

DATA PACKET REQUEST

DATA PACKET INDICATION

WRITE INDICATION

MEDIA

DATA PACKET

RESPONSE SUBACTION

CONFIRMATION (PENDING)

ACKNOWLEDGEMENT (PENDING)

RESPONSE (PENDING)

WRITE CONFIRMATION

OPERATION OF ANOTHER LINK LAYER IS POSSIBLE BETWEEN TWO SUBACTIONS

NO-DATA PACKET INDICATION

NO-DATA PACKET

NO-DATA PACKET REQUEST

WRITE RESPONSE (COMPLETED)

RESPONSE SUBACTION

WRITE CONFIRMATION

RESPONSE (COMPLETED)

ACKNOWLEDGEMENT (COMPLETED)

CONFIRMATION (COMPLETED)

F I G. 28B

SUBACTION 1 (REQUEST)

SUBACTION 2 (RESPONSE)

ACKNOWLEDGE GAP

SUBACTION GAP

ARBITRATION

DATA PREFIX

DATA END

ACKNOWLEDGE PACKET

PACKET

FIG. 29

COMMAND REGISTER AND RESPONSE REGISTER

IEEE1394 BUS

TARGET

NODE B

REGISTER ADDRESS

INITIAL REGISTER SPACE

COMMAND REGISTER (512BYTES)	0000B00
RESPONSE REGISTER (512BYTES)	0000D00

CONTROLLER

NODE A

INITIAL REGISTER SPACE

REGISTER ADDRESS

0000B00	COMMAND REGISTER (512BYTES)
0000D00	RESPONSE REGISTER (512BYTES)

COMMAND FRAME

RESPONSE FRAME

FIG. 30

TRANSMITTED FIRST

destination_ID		t1	rt	0001	pri
source_ID					
destination_offset					
data_length		zero			
header_CRC					
cts					
FCP data					
zero pad bytes (if necessary)					
data_CRC					

FCP FRAME

TRANSMITTED LAST

F I G. 31

AV/C COMMAND FRAME

TRANSMITTED FIRST

0000	ctype	subunit_type	subunit ID	opcode	operand [0]
operand [1]		operand [2]		operand [3]	operand [4]
operand [n]			zero pad bytes (if necessary)		

TRANSMITTED LAST

F I G. 32

AV/C RESPONSE FRAME

TRANSMITTED FIRST

0000	response	subunit_type	subunit ID	opcode	operand [0]
operand [1]		operand [2]		operand [3]	operand [4]
operand [n]			zero pad bytes (if necessary)		

TRANSMITTED LAST

F I G. 33

FFFFF0000B00

COMMAND
REGISTER
(512 BYTES) —— 42-1

FFFFF0000D00

RESPONSE
REGISTER
(512 BYTES) —— 42-2

FFFFF0003000

DATA
REGISTER —— 42-3

FORMAT
REGISTER
ADDRESS

FORMAT
REGISTER —— 42-4

F I G. 34

FFFFF0000B00

```
COMMAND
REGISTER
(512 BYTES)
```

43-1

FFFFF0000D00

```
RESPONSE
REGISTER
(512 BYTES)
```

43-2

FFFFF0003000

```
DATA
REGISTER
```

PUSH

43-3

COMMAND FRAME →

← RESPONSE FRAME

DATA FRAME
(PRINT DATA) →

FFFFF0000B00

```
COMMAND
REGISTER
(512 BYTES)
```

43-4

FFFFF0000D00

```
RESPONSE
REGISTER
(512 BYTES)
```

43-5

FFFFF0003000

```
DATA
REGISTER
```

43-6

FORMAT
REGISTER
ADDRESS

FORMAT FRAME →
(FORMAT INFORMATION)

```
FORMAT
REGISTER
```

43-7

IMAGE PROVIDING DEVICE

PRINTER

FIG. 35

FORMAT REGISTER		
43-7		

INQUIRY	
44-1	CONTROL/ STATUS
	44-2

GLOBAL	44-3
LOCAL	44-4
FORMAT [1]	44-5
FORMAT [2]	44-6
FORMAT [N]	44-7
STATUS REGISTER	44-8
GLOBAL	44-9
LOCAL	44-10
FORMAT [1]	44-11
FORMAT [2]	44-12
FORMAT [N]	44-13

PRINTER COMMON REGISTER GROUP

PRINTER FORMAT REGISTER GROUP

PRINTER COMMON REGISTER GROUP

PRINTER FORMAT REGISTER GROUP

F I G. 36

PRINTER COMMON
REGISTER GROUP

44-8

STATUS REGISTER

31   v   0

45-1

COMMON STATUS REGISTER

ERROR WARNING/PAPER STATE/PRINT STATE

31   0

45-2

VENDOR SPECIFIC STATUS REGISTER

RESERVE

F I G. 37

44-3

PRINTER COMMON
REGISTER GROUP
(GLOBAL)

media-type	46-1
paper-size	46-2
page-margin	46-3
page-length	46-4
page-offset	46-5
print-unit	46-6
color-type	46-7
bit-order	46-8

F I G. 38

44-4

PRINTER COMMON
REGISTER GROUP
(LOCAL)

paper	47-1
CMS	47-2
ink	47-3

F I G. 39

44-5

FORAMT [1]		inX-rate	48-1
		inY-rate	48-2
EXIF FORMAT		outX-rate	48-3
		outY-rate	48-4

F I G. 40

44-6

FORAMT [2]		inX-rate	49-1
		inY-rate	49-2
RAW RGB FORMAT		outX-rate	49-3
		outY-rate	49-4
		XY-size	49-5
		bit-pixel	49-6
		X-size	49-7
		Y-size	49-8
		plane	49-9
		X-resolution	49-10
		Y-resolution	49-11
		pixel-format	49-12

F I G. 41

COMMAND CLASSIFICATION	COMMAND	RESPONSE	
STATUS	GetStatus	GetStatusResponse	50-1
CONTROL	PrintReset	Print ResetResponse	50-2
	PrintStart	PrintStartResponse	50-3
	PrintStop	PrintStopResponse	50-4
	InsertPaper	InsertPaperResponse	50-5
	EjectPaper	EjectPaperResponse	50-6
	CopyStart	CopyStartResponse	50-7
	CopyEnd	CopyEndResponse	50-8
BLOCK / BUFFER	BlockSize	BlockSizeResponse	50-9
	BlockAddress	BlockAddressResponse	50-10
	FreeBlock	FreeBlockResponse	50-11
	WriteBlocks	WriteBlocksResponse	50-12
	BufferConfig	BufferConfigResponse	50-13
	SetBuffer	SetBufferResponse	50-14
CHANNEL	OpenChannel	OpenChannelResponse	50-15
	CloseChannel	CloseChannelResponse	50-16
TRANSFER	TransferMethod	TransferMethodResponse	50-17
FORMAT	SetFormat	SetFormatResponse	50-18
LOG-IN	Login	LoginResponse	50-19
	Logout	LogoutResponse	50-20
	Reconnect	ReconnectResponse	50-21
DATA	WriteBlock		50-22
	WriteBuffer		50-23
	PullBuffer		50-24

F I G. 42

EXIF(TIFF, JPEG)	EXIF NON-COMPRESSED AND COMPRESSED DATA
TIFF/EP	TIFF EXTENDED VERSION
RGB	RGB RAW IMAGE
YUV	YUV RAW IMAGE
YCrCb	YCrCb RAW IMAGE
CMYK	CMYK RAW IMAGE
Vendor Specific	VENDOR DEFINITION

F I G. 43

IMAGE
PROVIDING
DEVICE   PRINTER

SetFormat (INQUIRY)   S500

SetFormatResponse   S501

SetFormat
(CONTROL/STATUS)   S502

SetFormatResponse   S503

INQUIRY Registers   S504-1

⋮

S504-m

CONTROL/STATUS
Registers   S505-1

S506-1

⋮

S505-n

S506-n

F I G. 44

IMAGE
PROVIDING
DEVICE   PRINTER

TransferMethod
(INQUIRY)   S600-1

TransferMethodResponse   S600-2

TransferMethod
(CONTROL/STATUS)   S600-3

TransferMethodResponse   S600-4

FIG. 45

COMMAND REGISTER (512 BYTES) 0B00

RESPONSE REGISTER (512 BYTES) 0D00

DATA REGISTER (Block Size) 3000

IMAGE PROVIDING DEVICE

601-4 COMMAND FRAME

601-1

601-5 RESPONSE FRAME

601-2

601-6 DATA FRAME (PRINT DATA)

PUSH

601-3

COMMAND REGISTER (512 BYTES) 0B00

RESPONSE REGISTER (512 BYTES) 0D00

DATA REGISTER 3000

PRINTER

601-7

601-8

601-9

Block Size

FIG. 46

DATA HEADER ⟩ 602-1
DATA PAYLOAD ⟩ 602-2

FIG. 47

603-1		603-2	
15	8	7	0
BlockCount		RESERVE	

FIG. 48

BlockAddress

PUSH

604-1

| BlockCount |
| DATA REGISTER |

PRINTER

604-2

| BlockCount |
| Block[0] |

| BlockCount |
| Block[1] |

604-3

| BlockCount |
| Block[2] |

604-4

...

604-5

| BlockCount |
| Block[n] |

Block Size

n is BlockCount

MEMORY SPACE

604-6

FIG. 49

IMAGE
PROVIDING
DEVICE.

PRINTER

FreeBlock → S605-1

ack_complete(FreeBlock) → S605-2

FreeBlockResponse → S605-3

ack_complete(FreeBlock) → S605-4

FIG. 50

IMAGE PROVIDING DEVICE

PRINTER

Login	S606-1
LoginResponse	S606-2
FORMAT SETTING COMMAND GROUP	S606-3
OpenChannel	S606-4
OpenChannelResponse	S606-5
FreeBlock	S606-6
FreeBlockResponse (FreeBlockCount)	S606-7
WriteBlock	S606-8
(Write transaction response)	S606-9
WriteBlock	
(Write transaction response)	

FreeBlockCount — BlockTransfer

FreeBlock

FreeBlockResponse (FreeBlockCount)

WriteBlock
(Write transaction response)

FreeBlockCount — BlockTransfer

......

F I G. 51

IMAGE
PROVIDING
DEVICE

PRINTER

Login — S607-1

LoginResponse — S607-2

S607-3

FORMAT SETTING
COMMAND GROUP

OpenChannel — S607-4

OpenChannelResponse — S607-5

WriteBlocks — S607-6

WriteBlocksResponse
(FreeBlockCount<INTERIM>) — S607-7

WriteBlock — S607-8

(Write transaction response) — S607-9

WriteBlock

(Write transaction response)   FreeBlockCount   BlockTransfer

WriteBlockResponse
(FreeBlockCount<CONTINUE>) — S607-10

WriteBlock

(Write transaction response)   FreeBlockCount

BlockTransfer

WriteBlockResponse
(FreeBlockCount<CONTINUE>)

CloseChannel — S607-11
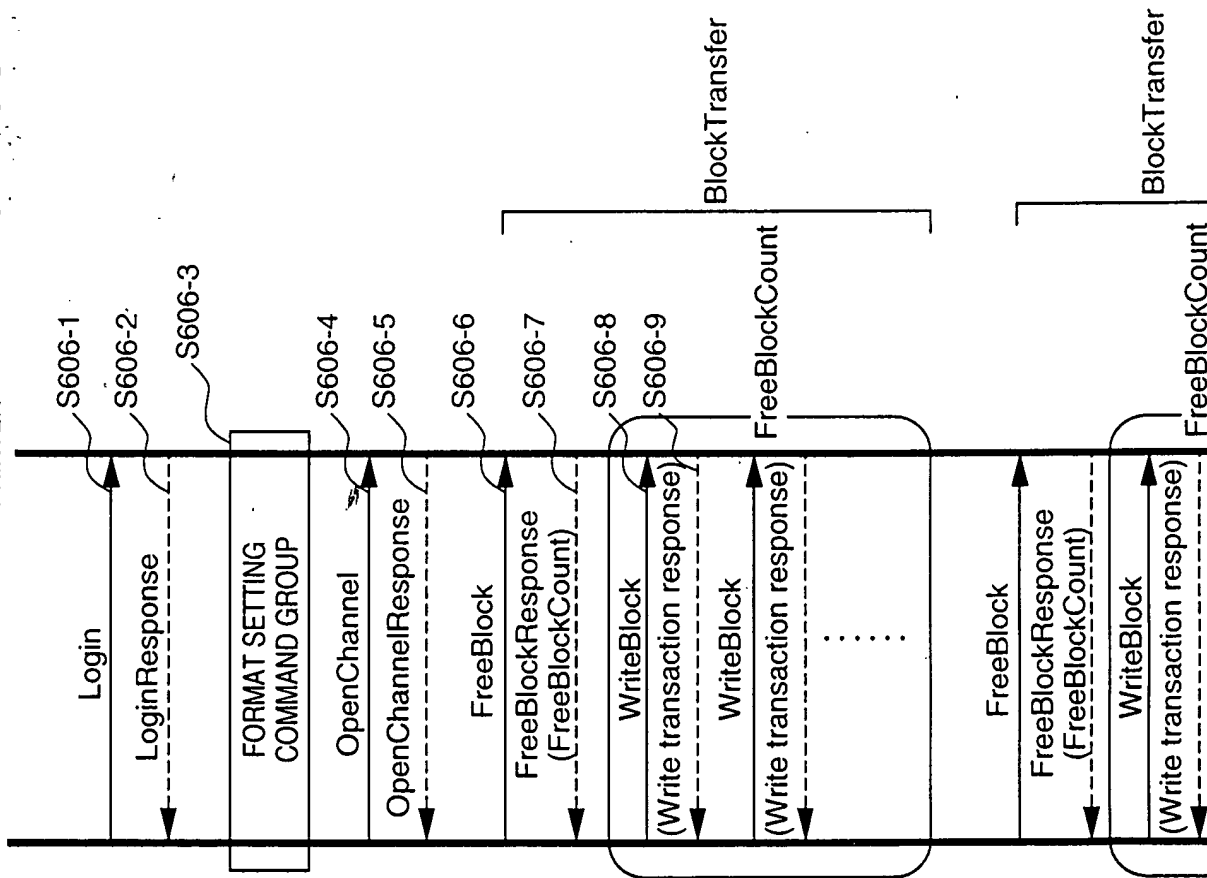
CloseChannelResponse — S607-12

Logout — S607-13

LogoutResponse — S607-14

FIG. 52

IMAGE PROVIDING DEVICE   PRINTER

FreeBlock →   S608-1

ack_pending(FreeBlock) ←   S608-2

FreeBlock confirm ←   S608-3

ack_complete
(FreeBlock confirm) →   S608-4

FreeBlockResponse
(FreeBlockCount) ←   S608-5

ack_pending
(FreeBlockResponse) →   S608-6

FreeBlockResponse confirm
(FreeBlockCount) →   S608-7

ack_complete
(FreeBlockResponse.confirm) ←   S608-8

FIG. 53

IMAGE PROVIDING DEVICE   PRINTER

WriteBlock →   S609-1

ack_pending(WriteBlock) ←   S609-2

(Write transaction response) ←   S609-3

ack_complete
(Write transaction response) →   S609-4

FIG. 54

IMAGE PROVIDING DEVICE   PRINTER

WriteBlock →   S610-1

ack_complete(WriteBlock) ←   S610-2

F I G. 55

IMAGE
PROVIDING
DEVICE

PRINTER

S611-1

OBTAIN FreeBlockCount

S611-2

WriteBlock[0]

S611-3

(Write transaction response)

S611-4

WriteBlock[1]

...

S611-5

WriteBlock[n-1]

S611-6

WriteBlock[n]

S611-7

OCCURRENCE OF BUS RESET

S611-8

WriteBlock[n]

S611-9

WriteBlock[n+1]

S611-10

WriteBlock[n+2]

...

S611-11

WriteBlock[255]

FIG. 57

IMAGE
PROVIDING
DEVICE   PRINTER

Login →

← LoginResponse

FORMAT SETTING
COMMAND GROUP

OpenChannel →

← OpenChannelResponse

BufferConfig(INQUIRY) →   S1701

← BufferConfigResponse   S1702

BufferConfig(CONTROL) →   S1703

← BufferConfigResponse   S1704

SetBuffer(NOTIFY) →   S1705

← SetBufferResponse(INTERIM)   S1706

WriteBuffer →   S1707

← (Write transaction response)   S1708

WriteBuffer →

← (Write transaction response)   S1710

WriteBuffer →

← (Write transaction response)   PUSH DATA

⋮

WriteBuffer →

← (Write transaction response)

← SetBufferResponse
(CONTINUE)   S1709

⋮

CloseChannel →

← CloseChannelResponse

Logout →

← LogoutResponse

F I G. 58

DATA PAYLOAD 67-1

F I G. 59

Destination_Offset

68-1

PUSH → DATA REGISTER

PRINTER

BufferAddress

Data_Length

Buffer Size

68-2

MEMORY SPACE

FIG. 60

Data_Length

0B00	COMMAND REGISTER (512 BYTES)
0D00	RESPONSE REGISTER (512 BYTES) 69-4

| 3000 | DATA REGISTER 69-5 |

PRINTER

69-7 COMMAND FRAME

69-1

69-8 RESPONSE FRAME

69-2

69-9 DATA FRAME (PRINT DATA) PULL

69-3

0B00	COMMAND REGISTER (512 BYTES)
0D00	RESPONSE REGISTER (512 BYTES)

DATA REGISTER

Destination_Offset

IMAGE PROVIDING DEVICE

F I G. 61

IMAGE
PROVIDING
DEVICE   PRINTER

Login

LoginResponse

FORMAT SETTING
COMMAND GROUP

OpenChannel

OpenChannelResponse

BufferConfig(INQUIRY)   S1711

BufferConfigResponse   S1712

BufferConfig(CONTROL)   S1713

BufferConfigResponse   S1714

SetBuffer(NOTIFY)   S1715

SetBufferResponse(INTERIM)   S1716

PullBufferRequest   S1717

PullBuffer   S1718

PullBufferRequest

PullBuffer

PullBufferRequest   S1720

PullBuffer

⋮

PullBufferRequest   PULL DATA

PullBuffer

SetBufferResponse
(CONTINUE)   S1719

⋮

CloseChannel

CloseChannelResponse

Logout

LogoutResponse

F I G. 62

MEMORY SPACE

F I G. 63

COMMAND FRAME

75-1

RESPONSE FRAME

75-2

0B0h

COMMAND REGISTER (512 BYTES)

0D00

RESPONSE REGISTER (512 BYTES)

IMAGE PROVIDING DEVICE

0B00

COMMAND REGISTER (512 BYTES)

75-3

0D00

RESPONSE REGISTER (512 BYTES)

75-4

PRINTER

FIG. 64

IMAGE
PROVIDING
DEVICE

PRINTER

Login — S507

LoginResponse — S508

S509
FORMAT SETTING
COMMAND GROUP

OpenChannel — S510

OpenChannelResponse — S511

FreeBlock — S512

FreeBlockResponse
(FreeBlockCount) — S513

S514
Iso.Block
Iso.Block
Iso.Block
Iso.Block
⋮

FreeBlockCount

BlockTransfer

NUMBER OF TRANSFER
BYTES IN THIS CASE IS
FreeBlockCount × BlockSise

FreeBlock — S515

FreeBlockResponse
(FreeBlockCount) — S516

Iso.Block
Iso.Block
⋮

FreeBlockCount

BlockTransfer

⋮

CloseChannel — S518

CloseChannelResponse — S519

Logout — S520

LogoutResponse — S521